

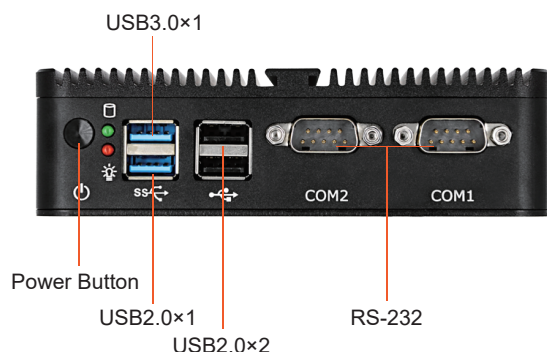


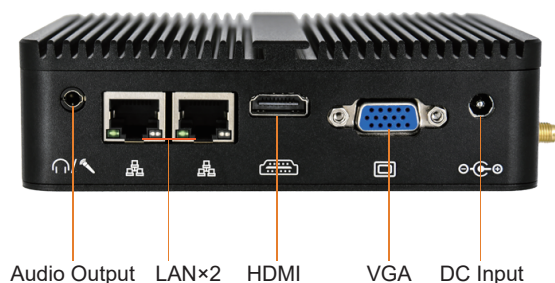

Features


- Onboard Intel Celeron J1900/J1800/J4105 CPU
- DDR3/DDR4 SODIMM×1 ,Up to 8GB Memory
- VGA+HDMI
- 1 x SATA (2.5" HDD) , 1 x mSATA
- Fanless Operation
- Temperature: -20°C~70°C



Specifications

System	
Model	SX-MPC-N2
Processor	Onboard Intel Celeron J1 900/J1800/J4105 CPU
System Memory	DDR3/4 SODIMM×1, Up to 8GB Memory
Display	HDMI, VGA
Ethernet	2 x GbE RJ45 Realtek 8111H
I/O Port	3 x USB2.0, 1 x USB3.0 2 x DB-9 COM1&COM2, RS-232 1 x Audio Line-out, 1 x Audio Mic-in 1 x Power Button 1 x Power LED 1 x HDD LED 1 x Power input 1 x Antenna interface for WIFI
Storage Disk Driver	1x MSATA 1x HDD/SSD
Expansion Slot	Mini-PCIe x1 half size for WIFI/BLT
Watchdog timer	1~255 Levels
OS support	Windows® 7 /8/10, WES 7,LINUX
Mechanical	
Construction	Aluminum
Mounting	VESA 75/ Panel mount
Dimension	135 x 127x38.7 mm
Net Weight	TBD
Environmental	
Operating Temperature	-20°C ~ 70 °C
Storage Temperature	-30°C ~ 70°C
Storage Humidity	95% @40°C, non-condensing
Adapter	
DC input	DC 12V

Dimension ■ Unit:mm

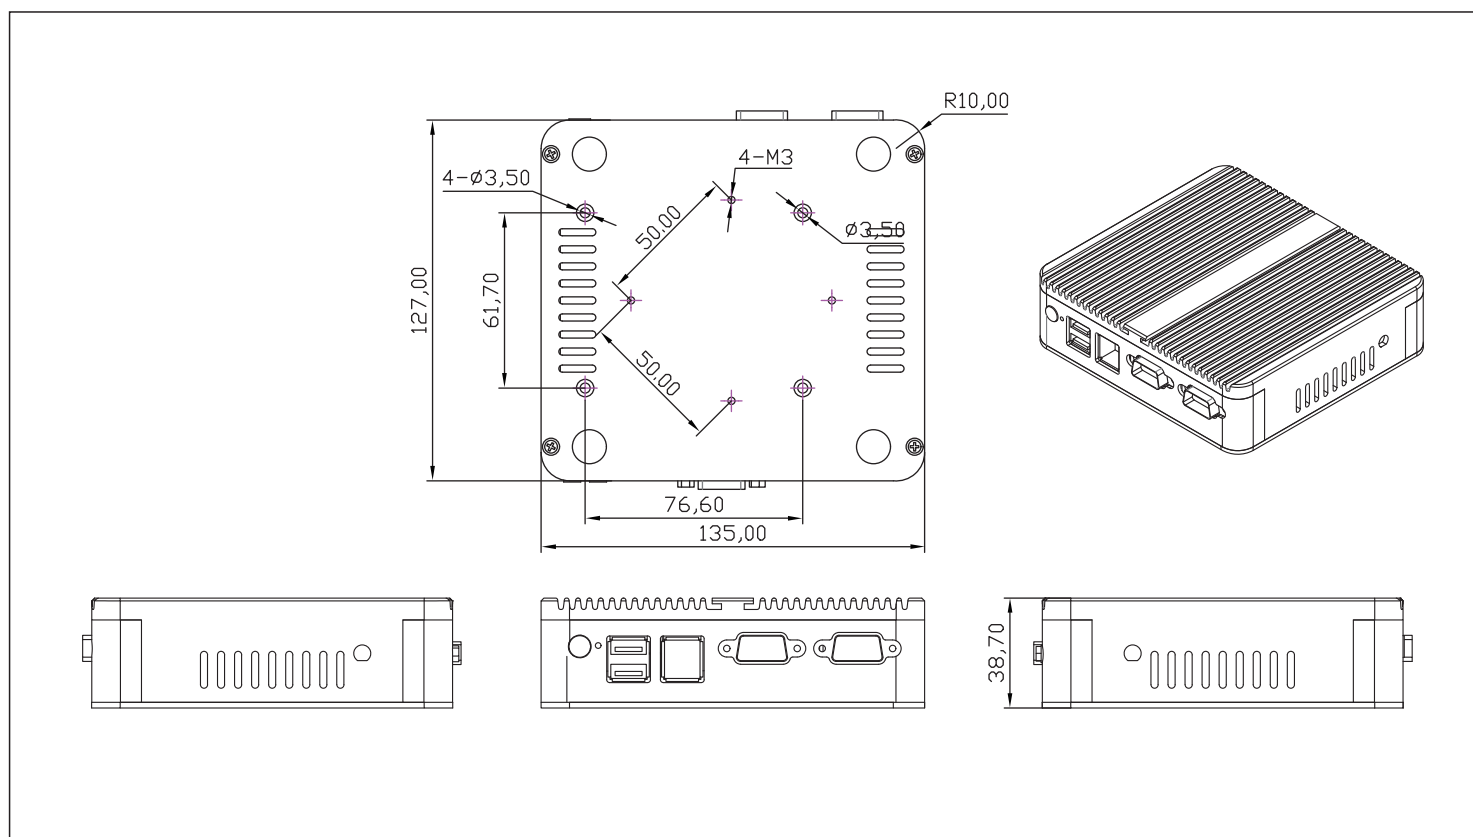

Ordering Information

Part Number	Description
N1-1900	BOX PC J1900 CPU DDR3L SO-DIMM 1xUSB3.0,3x USB2.0 2x LAN 2 x COM VGA+HDMI Line out, Mic-in 1xPower Adapter
N1-1800	BOX PC J1800 CPU DDR3L SO-DIMM 1xUSB3.0,3x USB2.0 2x LAN 2 x COM VGA+HDMI Line out Mic-in 1xPower Adapter
N1-J4105	BOX PC J4105 CPU DDR4 SO-DIMM 1xUSB3.0,3x USB2.0 2x LAN 2 x COM VGA+HDMI Line out Mic-in 1xPower Adapter

Packing list

- BOX-2L2C
- Power Adapter
- 2.5" HDD brackets
- Screw

Optional Accessories

- WIFI module
- SSD

Contact Us:

Office:8/F,JinXiuHongDu Building, Meilong Blvd., Longhua Dist., Shenzhen, China 518131

Factory:

Floor 3, building A, Yinxin science and Technology Park, No. 2, Jinquan 3rd road,
Liuyue community, Henggang street, Longgang District, Shenzhen,China

Site:www.snroprinter.com